


TZe Fabric Tape Cassette INSTRUCTION SHEET

You can easily attach the fabric tape on garments by using an iron.
[Be sure to read the instructions before use]

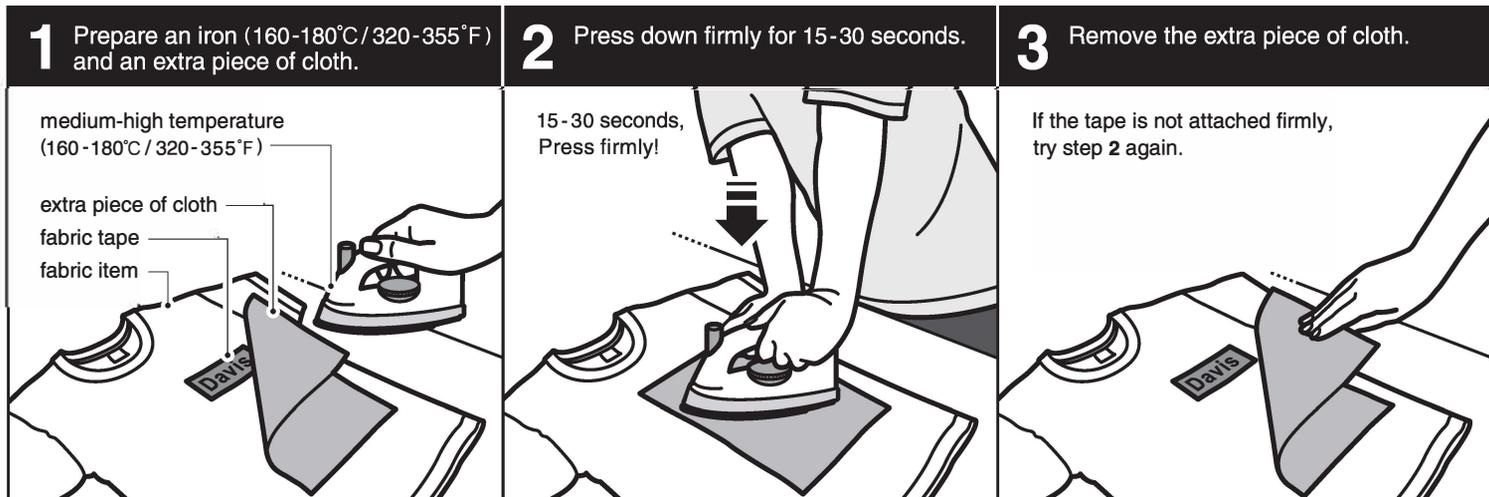

FOR PROPER TEMPERATURE SETTING, REFER TO THE USERS GUIDE OF YOUR OWN IRON.

LAG942001 Printed in China



FABRIC MATERIALS

○ Suitable

- Cotton 100%
- Linen 100%
- Polyester 100%
- Polyester + Cotton

Please note that the above suitable fabrics should have relatively smooth surfaces for best results.

✗ Unsuitable

- Wool, Rayon, Chemical fiber
- Pile (towels) and other thick materials
- Denim and other rough surfaced materials
- Waterproof materials
- Non-heatproof materials
- Elastic (stretch) type materials

This tape can be easily attached on garments and other fabric items by using an iron. Be sure to read the instructions and be aware of the procedures and warnings for proper use. Store this instruction sheet in a safe place for future reference.

FOR YOUR SAFETY

⚠ CAUTION

- ⊘ Do not touch the garment's surface or tape after attaching with an iron. It will be hot and may cause a burn. (Read the users guide of your iron as well before use.)
- ⊘ Because the application of this tape requires the use of a hot iron, it must only be done by a responsible adult.

NOTES

- Be sure to use scissors to cut the tape. The built-in cutter on the P-touch machine may not be effective for fabric tape.
- Do not place the fabric tape in your mouth although it is non-toxic.
- Test on a part of the garment which is normally hidden from attention before attaching the fabric tape on the desired position.

SUITABLE AND UNSUITABLE MATERIALS

- Materials suitable for attaching the fabric tape (smooth surface): Cotton 100%, Linen 100%, Polyester 100%, Polyester + Cotton
- ✗ Materials unsuitable for attaching the fabric tape: Wool, Rayon, Chemical fiber, Pile (towels) and other thick materials, Denim and other rough surfaced materials, Waterproof materials, Non-heatproof materials, Elastic (stretch) type materials

LAUNDERING/DRY CLEANING


- Garments with correctly attached fabric tapes can be washed or dry-cleaned over 30 times. General mild or alkaline detergents may be used.
- Put garment in a net when washing.
- Wash in water which is at a temperature lower than 80°C / 175°F.
- The fabric tape may be discolored if the garment is placed in bleach for an extended period of time.
- If it is necessary to use a clothes dryer for labeled items, please use the lowest heat setting possible.
- The fabric tape can be attached again with an iron if it comes off after washing.

REMOVING

- Place another piece of cloth over the fabric tape, press down firmly with an iron set to a medium-high temperature (160-180°C / 320-355°F), then use tweezers to peel off the fabric tape starting from its edge. The fabric tape and the iron are extremely hot. Be careful not to burn yourself.
- Some adhesive with ink on it may remain on the garment.

CREATING A LABEL WITH FABRIC TAPE

- ① Cut off the excess fabric tape by using scissors.
- ② Set the fabric tape cassette properly on the P-touch machine, type in the desired text, and print out.
- ③ Remove the tape cassette from the machine and cut off the tape with scissors. (The built-in cutter on the P-touch machine may not be effective for fabric tape.)



ATTACHING THE FABRIC TAPE

- ① Set the iron to medium-high temperature (160-180°C / 320-355°F)
- ② Smooth out the surface of the garment with an iron before placing the fabric tape.
- ③ With the printed surface facing upwards, place the tape on the garment where you wish to attach.
- ④ Cover the fabric tape with another piece of cloth, and place an iron on the edge of the tape. (If the tape shifts to undesirable place, refer to "Removing" and try from the beginning again.)
- ⑤ Confirm that the fabric tape is positioned properly, and press down firmly on the piece of cloth that is covering the tape for 15-30 seconds. (Do not move the iron while pressing down since this may cause the fabric tape to move to an undesirable position.)
- ⑥ If the attached tape is loose or partially peeling off, try step ⑤ again. (Be sure to place another piece of cloth between the tape and the iron.)



- If the garment has temperature requirement, refer to the instruction on the garment. However, the tape may not be attached firmly if the iron is set on low temperature or if it is not pressed long/hard enough.
- Always place another piece of cloth between the tape and the iron so that the printed text will not transfer to the iron. The extra piece of cloth should be thin, like a handkerchief. Please be sure to use a piece of cloth that is disposable since the printed text may transfer to the extra piece of cloth.
- Do not move the iron while pressing down. The tape may move or peel and may not be attached as desired.
- Use an ironing board with a hard surface and press hard with the center of the iron, not the edge of the iron.