brother
at your side
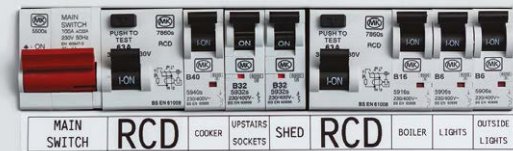
The Pro Tape range

Strong Adhesive

Flexible ID

Security

Self-Laminating

Professional grade labels for Trade

New

brother
at your side

P-touch

Developed to meet the needs of tradespeople and other professionals looking for reliable long-term identification that withstands the test of time.

HSe TUBE

HEAT SHRINK TUBE
5.2mm
CABLE ø:0.8-3.1mm
600V | 125°C | VW-1
BLACK ON WHITE
HSe-211E 3:1 1.5m

MARK OF A SMART
PROFESSIONAL

Full testing information at www.brother.eu/tze-data

The Pro Tape range

A range of tapes to meet the identification needs of electricians, network installers and other professionals.

Strong Adhesive Tape

For textured and smooth surfaces

In independent laboratory testing, Brother Strong Adhesive Tape maintained 3 times more strength on textured surfaces, than Brother standard tape on average. This makes it ideal for long term labelling even in the harshest conditions, especially on textured surfaces.

- Use on smooth and textured surfaces

Self-Laminating Tape

For network cable identification

Thanks to a protective overlaminate being applied to the whole label at the time of printing, the 24mm tape width can wrapped around CAT5E and even the thicker CAT6A network cables and still protect the text on the label.

- Use the 24mm width tape cassettes for cables with a diameter of 3.0 to 6.6mm
- Use the 36mm width tape cassettes for cables with a diameter of 3.0 to 10.4mm

Flexible ID Tape

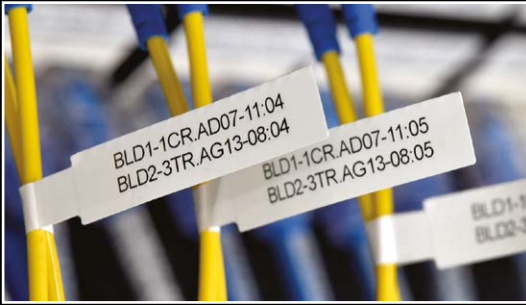**For wire and cable identification**

Developed for electricians, network infrastructure, panel builders and other industries that require a reliable wire and cable identification solution, this tape can also be used to mark pipes or other smaller cylindrical shaped items where other tapes may peel over time.

- Use for wrapping around wires and cables with a diameter of 3mm or more
- Use as a flag label around wires and cables with a diameter of 3mm or more

Flag Tape

For cable identification

Suited for small diameter cables, making this label ideal for fibre optic cable identification in the network industry. The label is a special pre-cut shape, and once printed the long "tail" can be placed around the cable, and the label simply folded over the tail to lock the label into position.

- Use for wires and cables with a diameter of 2.0 to 8.0mm

Security Tape

For tamper evident labelling

When printed and applied, the label appears the same as a standard black on white label. However if the label is removed, a checkerboard pattern is left that ensures that the label cannot be reapplied once peeled and shows the label has been tampered with.

- Use for asset marking to ensure that the label cannot be re-applied to another asset
- Use on the edge of panels or covers to show if this has been opened by unauthorised persons

Heat Shrink Tube

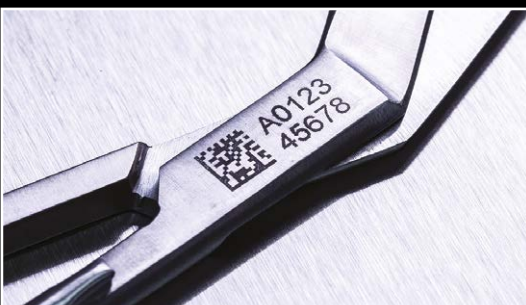## For wire and cable identification

This special non-adhesive tape is made of a special material that is wound in the tape cassette as a flat tube. Once printed with the relevant identification details, the tube is opened up and passed over a cable or terminating connector. Once heated using a heat gun, the tube shrinks to about half its original width, and in doing so grips the cable.

- Use for identification of cables and terminating connectors

Stencil Tape

For electrochemical etching/marking

When printed small holes are made in the tape that allows the etching chemical to permeate through the tape. When an etching pad is placed over the tape and pushed onto the metallic item, an electrical circuit is completed. The metal then discolours and is permanently marked with serial numbers or other required information.

- Requires electrochemical etching equipment (not available from Brother)

Professional packaging

clearly displaying the recommended application and tape information.

Large Brother, P-touch and tape type logos for instant recognition of compatibility with the customer's Brother P-touch label printer.

- Clear application photography for immediate understanding of the labelling application

- Detailed tape information to ensure customer purchases the correct tape, every time

- Real TZe label used to identify the type of tape Label colour matches the colour of the tape where applicable

Other tapes in the range have a printed background to identify the tape is transparent rather than white, or has the security function

Full Pro-Tape range:

	6mm	9mm	12mm	18mm	24mm	36mm
TZe STRONG ADHESIVE LAMINATED - 8 M						
Black on white	TZe-S211	TZe-S221	TZe-S231	TZe-S241	TZe-S251	TZe-S261
Black on transparent		TZe-S121	TZe-S131	TZe-S141	TZe-S151	
Black on yellow		TZe-S621	TZe-S631	TZe-S641	TZe-S651	
TZe FLEXIBLE ID LAMINATED - 8 M						
Black on white	TZe-FX211	TZe-FX221	TZe-FX231	TZe-FX241	TZe-FX251	TZe-FX261
Black on yellow	TZe-FX611	TZe-FX621	TZe-FX631	TZe-FX641	TZe-FX651	TZe-FX661
TZe SELF-LAMINATING - 8 M						
Black on white					TZe-SL251	TZe-SL261
Black on yellow					TZe-SL651	TZe-SL661
TZe SECURITY LAMINATED - 8 M						
Black on white				TZe-SE4	TZe-SE5	
STe STENCIL - 3 M						
Black on white				STe-141	STe-151	STe-161
FLe FLAG (DIE-CUT) - 72 LABELS						
Black on white					FLe-2511*	
Black on yellow					FLe-6511*	
Black on green					FLe-7511*	

	5.2mm	9.0mm	11.2mm	21.0mm	31.0mm	
HSe 3:1 HEAT SHRINK TUBE - 1.5 M						
Black on white	HSe-211E	HSe-221E	HSe-231E	HSe-251E	HSe-261E	
Black on yellow	HSe-611E	HSe-621E	HSe-631E	HSe-651E	HSe-661E	

* Labels are: 45mm x 21mm when printed. 45mm x 10.5mm once applied.

Choose the right tape for the job

To ensure optimum results use the correct tape for the intended application.

Smooth or textured surfaces:
Strong Adhesive Tape

Cable identification:
Self-Laminating Tape
Flexible ID Tape
Heat Shrink Tube
Flag Tape

For tamper evident labelling:
Security Tape

For electrochemical etching:
Stencil Tape

SURFACE	WIRE AND CABLE IDENTIFICATION				GENERAL IDENTIFICATION		
	Flexible ID	Self-Laminating	Heat Shrink Tube	Flag	Strong Adhesive	Security	Stencil
Smooth surfaces	✔				✔	✔	✔
Textured surfaces	●				✔	●	
Cable wrap	✔	✔	✔				
Cable flag	✔			✔			

✔ Recommended   ● Acceptable

HEAT SHRINK TUBE	Tape	Width	Recommended cable diameters
	HSe-211E	5.2mm	Ø0.8mm to 3.1mm
	HSe-221E	9.0mm	Ø1.6mm to 5.4mm
	HSe-231E	11.2mm	Ø2.1mm to 7.0mm
	HSe-251E	21.0mm	Ø4.2mm to 13.5mm
	HSe-261E	31.0mm	Ø6.3mm to 20mm
	HSe-611E	5.2mm	Ø0.8mm to 3.1mm
	HSe-621E	9.0mm	Ø1.6mm to 5.4mm
	HSe-631E	11.2mm	Ø2.1mm to 7.0mm
	HSe-651E	21.0mm	Ø4.2mm to 13.5mm
	HSe-661E	31.0mm	Ø6.3mm to 20mm

P-touch label printer compatibility

brother.dk
brother.ee
brother.fi
brother.is
brother.lv
brother.lt
brother.no
brother.se

03/2024

Model	Max tape width	Strong Adhesive	Flexible ID	Security	Heat Shrink Tube	Self-Laminating	Flag	Stencil
PT-E110	12mm	✔	✔					
PT-E300	18mm	✔	✔	✔	✔			
PT-E550W PT-E560BT	24mm	✔	✔	✔	✔	✔		
PT-D800W	36mm	✔	✔	✔	✔	✔	✔	✔
PT-P900W PT-P950NW	36mm	✔	✔	✔	✔	✔	✔	✔