SPECIFICATION SHEET Product name: BWS-1D300-080 (WAX)




BWS-1D300-080 is a WAX thermal transfer ribbon for general use, designed for flat head printers. It is a state-of-the-art material with a "backcoating" layer developed to withstand three times more thermal impulse.

Applications

- Labelling in warehouse / shipments
- Traceability labelling
- Pharmaceutical leaflets


Supports

- Matte paper
- Couche paper / High gloss




Backcoating

- Favours high-speed printing
- Protects the head from both friction and particle adhesion
- Treatment against static electricity



Ink

- Melting point (DSC): 65°C
- Thickness: 7.60 ± 0.08 μm




SPECIFICATION SHEET



Product name: BWS-1D300-080 (WAX)

Resistance (polypropylene, 203 mm/s)

Resistance tests conducted in Electronic Crockmeter M238BB textile M238CT (400 cycles for dry and wet wiping and 200 cycles for metal rubbing).

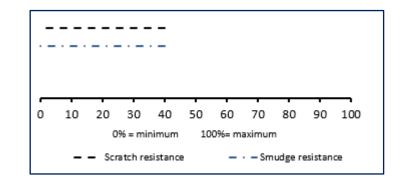

Certifications⁽¹⁾

•	REACH/SVHC	1907/2006EC
		850/2004
•	RoHS:	2011/65/EC

(1) All certifications are pending update

Colour range

Black

Storage

- 5 ° C to 35 ° C
- 45% to 85% relative humidity
- Protect the products from sunlight

Expiration

1 year

NOTE: These specifications are only a guide. Due to the large number of surfaces, label finishes, varnishes and applications, Brother International Europe recommends that the printing tests be made for each specific case in your own environment. **Effective May 2019.**