SPECIFICATION SHEET

Product name: BWS-1D600-110 (WAX)




BWS-1D600-110 is a WAX thermal transfer ribbon for general use, designed for flat head printers. It is a state-of-the-art material with a "backcoating" layer developed to withstand three times more thermal impulse.

Applications

- · Labelling in warehouse / shipments
- · Traceability labelling
- · Pharmaceutical leaflets


Supports

- · Matte paper
- · Couche paper / High gloss



Backcoating


- · Favours high-speed printing
- Protects the head from both friction and particle adhesion
- Treatment against static electricity



Ink

Melting point (DSC): 65°C

• Thickness: 7.60 ± 0.08 μm



Brother International Europe Ltd, Brother House, 1 Tame Street, Audenshaw, Manchester, M34 5JE Tel: +44 161 330 6531 Web: www.brother.eu


SPECIFICATION SHEET

Product name: BWS-1D600-110 (WAX)



Resistance (polypropylene, 203 mm/s)

Resistance tests conducted in Electronic Crockmeter M238BB textile M238CT (400 cycles for dry and wet wiping and 200 cycles for metal rubbing).

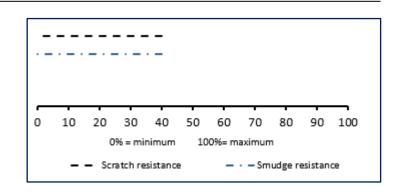

Certifications(1)

REACH/SVHC 1907/2006EC 850/2004
RoHS: 2011/65/EC

(1) All certifications are pending update

Colour range

Black

Storage

- 5 ° C to 35 ° C
- 45% to 85% relative humidity
- · Protect the products from sunlight

Expiration

1 year

NOTE: These specifications are only a guide. Due to the large number of surfaces, label finishes, varnishes and applications, Brother International Europe recommends that the printing tests be made for each specific case in your own environment. **Effective July 2020.**

Brother International Europe Ltd, Brother House, 1 Tame Street, Audenshaw, Manchester, M34 5JE Tel: +44 161 330 6531 Web: www.brother.eu